




MATING CONNECTOR:
DTM06-12SA (GREY-A KEY)
 0462-201-20141 SOCKET
 0413-204-2005 SEAL

DTM06-12SA (GREY-A KEY)	
1	MODULE GROUND
2	COMMON, 4
3	COMMON, 3
4	COMMON, 2
5	COMMON, 1
6	4-20mA V-BATT + OUTPUT
7	4-20mA SIGNAL INPUT
8	SIGNAL OUTPUT 1
9	SIGNAL OUTPUT 2
10	SIGNAL OUTPUT 3
11	SIGNAL OUTPUT 4
12	MODULE BATT +

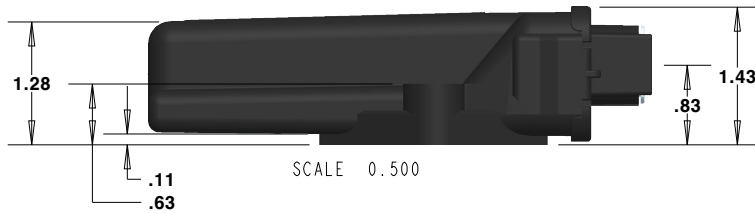

ATMOSPHERIC VENT PATCH
 VERTICAL INSTALLATION PREFERRED,
 DO NOT BLOCK

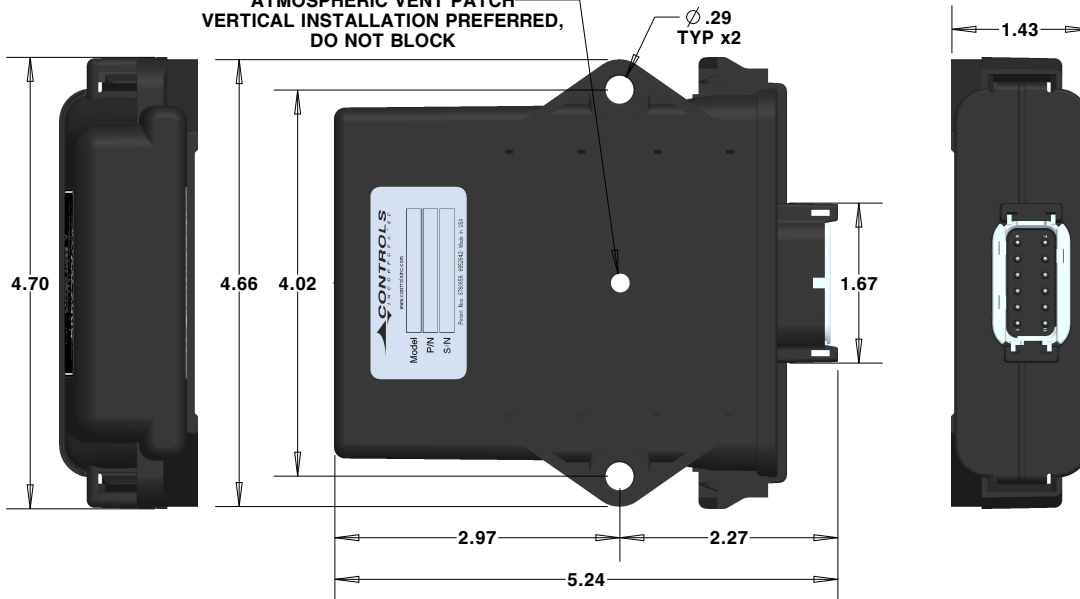

TOLERANCES ON DIMENSIONS UNLESS OTHERWISE SPECIFIED		 WWW.CONTROLSINC.COM 330-239-4345	
DECIMAL PLACE TOLERANCES	0.0 = ±0.060	NEXT ASS'Y:	
	0.00 = ±0.030	DESCRIPTION:	4-20mA SIGNAL REPEATER MODULE SINGLE 4-20mA → 4 OUTPUT
	0.000 = ±0.010		
ANGLES:	XX = ±0.5°	MATERIAL:	REFERENCE BILL OF MATERIAL
DRAWING UNITS UNLESS SPECIFIED: INCHES		STATUS:	RELEASED
DRAWN BY: KLD	DATE: 30-Sep-2022	MODEL:	XCAN
RELEASED:	DATE:	DRAWING NUMBER:	XCAN-420S
CONFIGURATION: 420S	SHEET: 1 OF 1	REV:	-